



15W DoE VI Fixed Pin Adapter

PSC15A-075-R / PSC15A-090-R

● 7.5V/9V ● DoE 6 ● Fixed Pin ● Wire ● Black



The 15W DoE 6 fixed pin adaptor series is the latest offering from a world leader in charging adapter technology and manufacturing - Phihong Technology. Phihong 15W DoE 6 fixed pin adaptor series are designed to work with most 7.5V/9V powered devices and conforms to most of the industry standards. They meet DoE level 6 energy efficiency requirements and we ensure our products meet or exceed all the industry performance and safety requirements.

Features :

Efficiency	DoE Level VI (87% Typ.)
No Load Input Power	≤ 100mW @ 115/230Vac
Eff @ 10% load	82% Typ. @ 115Vac/50Hz
Protection	SCP, OVP, OCP
Turn On Delay Time	≤ 1S @ 120Vac, max load
Hold-up Time	>8mS @ 120Vac, max load
Rise Time	≤ 100mS @ 120Vac, max load
Isolation	Primary to Secondary 3000Vac, 10mA for 1min.
Insulation	Primary to Secondary >7M ohm 500Vdc
DC Output Cable	1500±50mm, UL-2468 AWG#18
DC Output Connector	5.5x2.1x10mm, center positive, straight barrel
Dimension	71.5*50*31.2 (mm)
Weight	120 ± 5 (g)

Electrical Specifications :

Input Voltage	100~240Vac (90~264Vac min/max)
Frequency	50/60Hz Nom (47~63Hz min/max)
Input Current	500mA (RMS) @ 120Vac max load
	250mA (RMS) @ 230Vac max load
Output Voltage	7.5V / 9V
Output Current	2A / 1.67A
Maximum Output Power	15W continuous
Output Ripple & Noise	≤ 100mV (pk-pk) for 7.5V output
Line Regulation	±5%
Leakage Current	<0.25mA
Inrush Current	<40A @ 120Vac/60Hz, 25°C, cold start
	<60A @ 230Vac/50Hz, 25°C, cold start

Environmental Specifications :

Operating Temperature	0°C ~ +40°C
Storage Temperature	-40°C ~ +85°C
Operating Humidity	50% ~ 90% RH
Storage Humidity	50% ~ 90% RH
E-Cap Lifetime	>6yrs @ 80% load, 35°C ambient

Safety and Compliance :

UL/cUL60950-1, CB, IEC60950-1, CE Mark
EMC Emission: EN55022, EN61000-3-2
ESD : Air ±8KV, Contact: ±6KV E61000-4-2, Criteria A
Surge: ±2kV (L-L), EN61000-4-5, Criteria A
RF: EN55024, Criteria A
Voltage Dip: EN61000-4-11

Note:

- Measurements shall be made with an oscilloscope with 20MHz bandwidth. Output shall be bypassed at a connector with a 0.1uF ceramic capacitor and a 10uF low ESR electrolytic capacitor.
- Efficiency: Measure efficiency at 100%, 75%, 50%, 25% load after burn-in 30 minutes at 100% load, then compute the arithmetic average of these 4 values.



PHIHONG TECHNOLOGY CO., LTD.

+886-3-3277288
www.phihong.com.tw
phsales@phihong.com.tw




15W DoE VI Fixed Pin Adapter

PSC15A-075-R / PSC15A-090-R


● 7.5V/9V ● DoE 6 ● Fixed Pin ● Wire ● Black




Efficiency

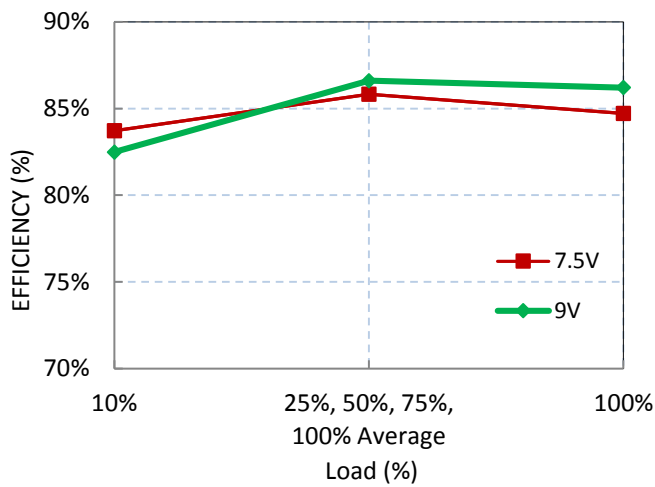


Ripple Noise

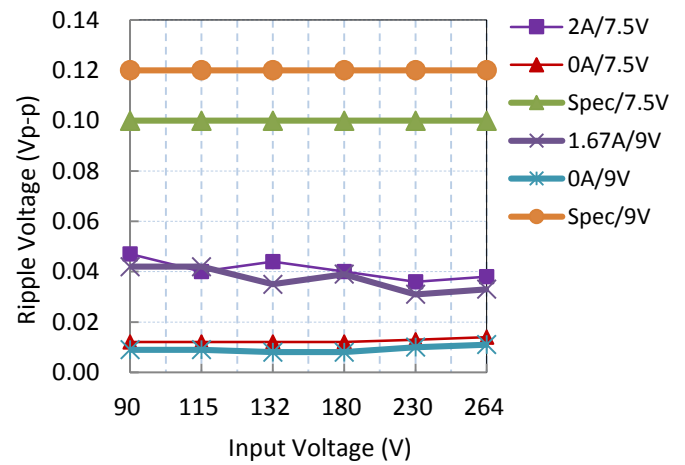

Line Regulation

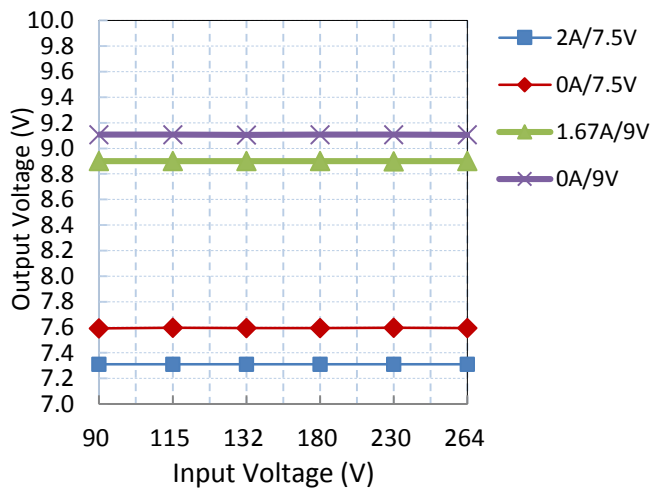

Load Regulation

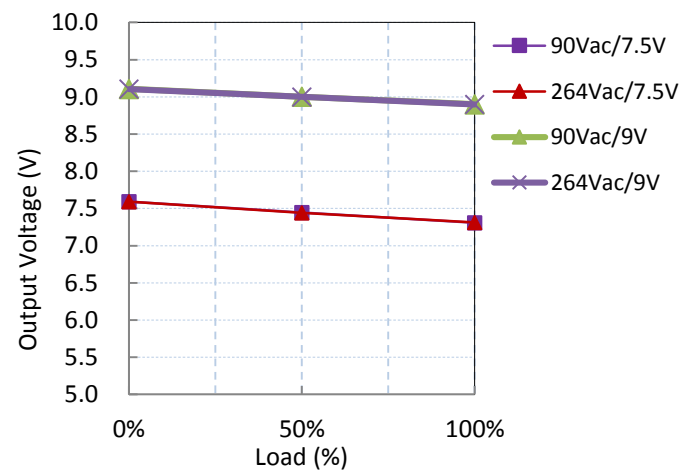

PHIHONG TECHNOLOGY CO., LTD.

+886-3-3277288
www.phihong.com.tw
phsales@phihong.com.tw




15W DoE VI Fixed Pin Adapter

PSC15A-075-R / PSC15A-090-R

● 7.5V/9V ● DoE 6 ● Fixed Pin ● Wire ● Black



Dimensions: mm

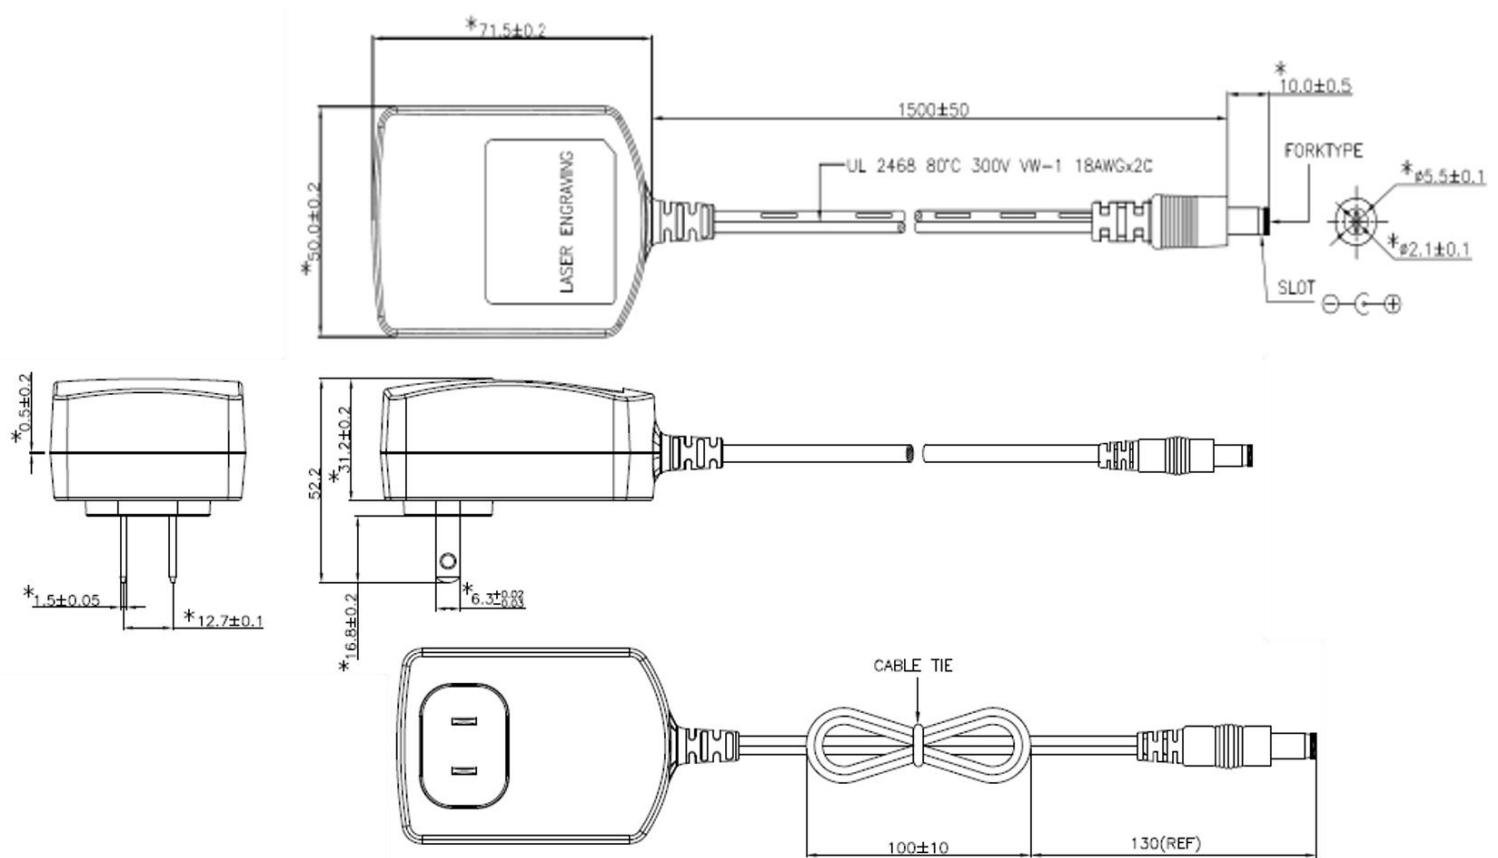

Model Selections

Model Number	Plug Type	Output Current (A ±5%)	Output Voltage (Vdc)	Max. Output Power (W)
PSC15A-075-R	US	2	7.5	15
PSC15A-090-R	US	1.67	9	15

Headquarters

No. 568, Fusing 3rd Rd.,
Gueishan District, Taoyuan City,
333, Taiwan, R.O.C.
Tel: +886-3-3277288
Fax: +886-3-3185999
phsales@phihong.com.tw
www.phihong.com.tw

Phihong USA

47800 Fremont Blvd.
Fremont, CA 94538, USA
Tel: +1-510-445-0100
Fax: +1-510-445-1678
usasales@phihongusa.com
www.phihong.com

Phihong China

Science & Technology Rd.,
Silver Lake Industrial Area
Qingxi Town, Dong Guan City,
Guang Dong (523648), China
Tel: +86-769-87319026
Fax: +86-769-87317106
phsales@phihong.com.tw

Phihong Japan

〒135-0016 東京都江東区東陽
3丁目23番24号 VORT 東陽町
ビル5階
TEL : +81-3-5677-1678
FAX : +81-3-5634-5255
phsales@phihong.com.tw
www.phihong.co.jp

Phihong Europe

Wattstraat 50, 2171 TR
Sassenheim, The Netherlands
Tel: +31-(0)-252-225910
Fax: +31-(0)-252-218764
sales@phihongeu.com
www.phihong-lighting.com



PHIHONG TECHNOLOGY CO., LTD.

- +886-3-3277288
- www.phihong.com.tw
- phsales@phihong.com.tw