




10W USB Type Interchangeable Clip Adapter

AQ10V-050A-R

● 5V/2A ● US, UK, EU & Australia AC clip ● DoE 6, CoC V5 Tier 2

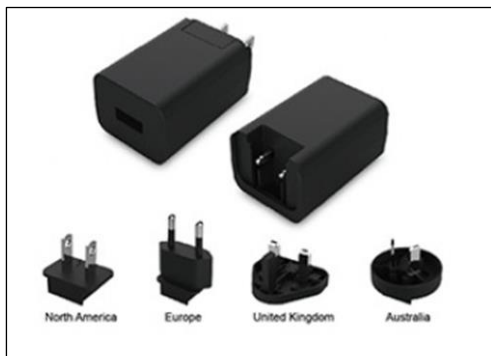

Phihong new R-Series USB adapter with interchangeable AC clips is the best choice for users to travel lightly and easily. This USB R-type adapter has 4 types of AC clips, US, UK, EU and Australia to meet your travel needs. Featuring universal input from 90V to 264V, it is USB 5V and has 10W output power. To achieve energy saving goal, it meets DoE Level VI and CoC V5 tier 2 energy efficiency requirements and compliant with or approved by UL/cUL, CE, FCC Class B, and EN55022B.

Features :

Efficiency	DoE Level VI and CoC V5 tier 2
No Load Input Power	$\leq 75\text{mW}$ @ 115/230Vac
Protection	OVP, OCP, SCP
Isolation	3000Vac, Primary to secondary 10mA, 1 min
Insulation Resistance	Primary to secondary 500Vdc 100M Ω min
OCP	2.3A max @ 90Vac~264Vac
SCP	No damage & auto restart
OVP	<6.3V, at 0A~2A Load
Average Efficiency	79% min @ 115Vac/230Vac
Efficiency @ 10% load	69.73% min @ 115Vac/230Vac
Output connector	USB CONN. 4PIN
Dimension (mm)	43.2 x 33.87 x 26.3
AC Plug	US, EU, UK & Australia

Electrical Specifications :

Input Voltage	100~240Vac (90~264Vac min/max)
Frequency	50/60Hz Nom (47~63Hz min/max)
Input Current	0.5A (RMS) max @ 90Vac
Output Voltage Range	4.75~5.25Vdc (Without cable/wire @25°C)
Output Current Range	0~2A
Maximum Output Power	10W
Output Ripple & Noise	150mVpk-pk max@25°C
Earth Leakage Current	20uA max
AC Inrush Current	35A max @ 264Vac (Cold Start @ Ambient 25°C)
Hold-up Time	10ms min @ 115Vac/230Vac, full load
Turn-On Delay Time	2s max @ 90Vac, full load
Rise Time	30ms max @ 230Vac, full load

Environmental Specifications :

Operating Temperature	-10°C ~ +45°C
Storage Temperature	-40°C ~ +70°C
Humidity, Operation	5%~95% RH
Humidity, Storage	5%~95% RH
Altitude	5000M
MTBF (MIL-HDBK-217F)	>100K hrs @ 230Vac, 25°C

Safety and Compliance :

Safety Certifications	IEC60950-1, CB
EMI Requirement	FCC part 15 class B rules, EN55022 class B rules, ANSI C63.4 class B rules, VCCI class II rules
EMS Requirement	
ESD	IEC61340-5-1: EN61000-4-2, Level 4, Criteria C (Contact 8KV, Air 15KV)
RS	EN61000-4-3, 80~1000MHz min 4V/m 80% AM (1KHz), Criteria A
CS	EN61000-4-6, 0.15~80MHz min 4V 80% AM (1KHz), Criteria A
EFT	EN61000-4-4, Input A.C. Power ports +/- 2KV 5/50 Tr/Th nS (repetition), Criteria B
Surge	EN61000-4-5, Level 2, Criteria B (L-N 1KV, Differential mode)
DIP	EN61000-4-11
Noise	<25dBA, the distance is 10cm
RES	EN301511



PHIHONG TECHNOLOGY CO., LTD.

- +886-3-3277288
- www.phihong.com.tw
- phsales@phihong.com.tw




10W USB Type Interchangeable Clip Adapter

AQ10V-050A-R

● 5V/2A ● US, UK, EU & Australia AC clip ● DoE 6, CoC V5 Tier 2



Dimensions: mm

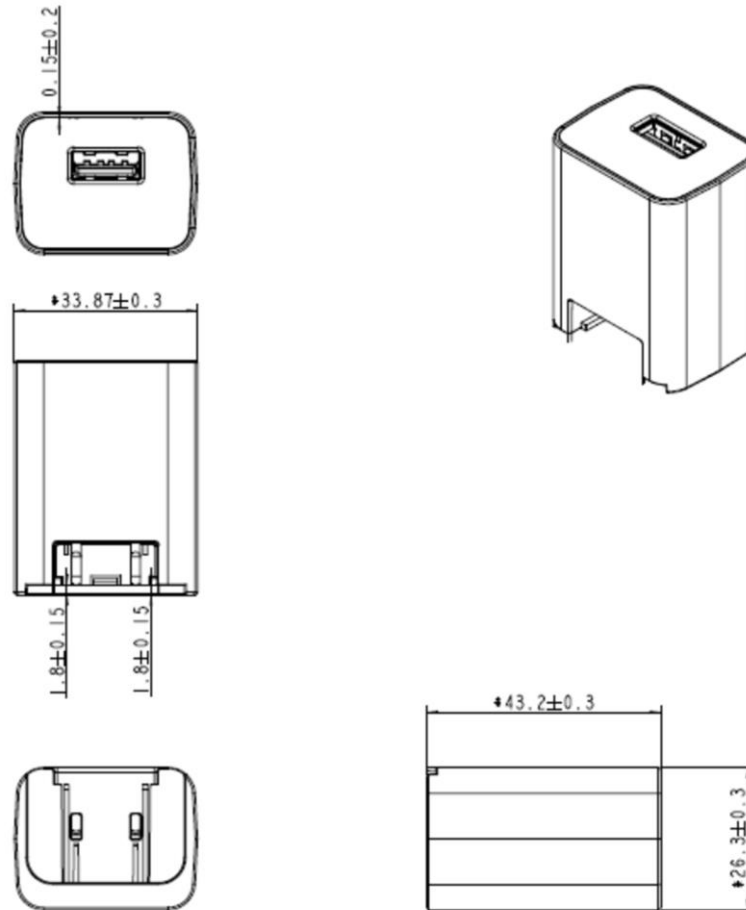

PHIHONG TECHNOLOGY CO., LTD.

- +886-3-3277288
- www.phihong.com.tw
- phsales@phihong.com.tw



10W USB Type Interchangeable Clip Adapter

AQ10V-050A-R

●5V/2A ●US, UK, EU & Australia AC clip ●DoE 6, CoC V5 Tier 2



Model Selections

Model Selections					
Model Number	Plug Type	Case Color	Output Current (A $\pm 5\%$)	Output Voltage (Vdc)	Max. Output Power (W)
AQ10V-050A-R	Interchangeable	Black	2	5	10
This model has US, UK, EU and Australia AC clips.					

AC Clip Selections

Country	Model Number
US	VPA-AAB1B-R
EU	VPE-AAB1B-R
UK	VPK-AAB1B-R
Australia	VPS-AAB1B-R

Headquarters

No. 568, Fusing 3rd Rd.,
Gueishan District, Taoyuan City,
333, Taiwan, R.O.C.
Tel: +886-3-3277288
Fax: +886-3-3185999
phsales@phihong.com.tw
www.phihong.com.tw

Phihong USA

47800 Fremont Blvd.
Fremont, CA 94538, USA
Tel: +1-510-445-0100
Fax: +1-510-445-1678
usasales@phihongusa.com
www.phihong.com

Phihong China

Science & Technology Rd.,
Silver Lake Industrial Area
Qingxi Town, Dong Guan City,
Guang Dong (523648), China
Tel: +86-769-87319026
Fax: +86-769-87317106
phsales@phihong.com.tw

Phihong Japan

〒135-0016 東京都江東区東陽
3丁目23番24号 VORT 東陽町
ビル5階
TEL: +81-3-5677-1678
FAX: +81-3-5634-5255
phsales@phihong.com.tw
www.phihong.co.jp

Phihong Europe

Wattstraat 50, 2171 TR
Sassenheim, The Netherlands
Tel: +31-(0)-252-225910
Fax: +31-(0)-252-218764
sales@phihongeu.com
www.phihong-lighting.com



PHIHONG TECHNOLOGY CO., LTD.

- +886-3-3277288
- www.phihong.com.tw
- phsales@phihong.com.tw